



# Design & Experimentation on T-Shaped Fractal Antenna for Wireless Applications

Er.Parvesh Kumar<sup>1</sup>, Er.Sumit Kaushik<sup>2</sup>  
Senior Engineer, Bharat Electronics Ltd<sup>1</sup>  
Executive Engineer, Bharti Airtel<sup>2</sup>

## Abstract:

This paper discusses results and discussion T- shaped fractal microstrip patch antenna for wireless applications. Initially square patch is analyzed. It is not having good characteristics, so two iterations of fractal geometry are applied to form T shaped fractal patch antenna. Which resonates multiple bands with good bandwidth and gain? Parametric analysis had been carried out by changing substrate feed technique and thickness. Fractal antenna resonated at 6.1 GHz, 7.5 GHz and 8.3 GHz. By using microstrip feed, antenna can be useful for GPS applications and by applying DGS; antenna can be useful for 3.3 GHz and 5.5 GHz with good directivity and gain and can be useful for Wi-Max and WLAN applications. Hence this antenna had been use for entire spectrum with applications of Wi-Max, WLAN and GPS with good bandwidth and gain.

**Keywords:** Microstrip patch antenna, T-Shaped, slot antenna, Fractal Techniques, wideband

## I. INTRODUCTION

Antenna is one of the largest components of the low profile wireless communication. In order to transmit and receive antenna information; modulation is done in which carrier wave is superimposed over modulating signal. At the required destination, the modulated signal was then received and the original information signal can be recovered by demodulation. Over the years, techniques have been developed for this process using electromagnetic carrier waves operating at radio frequencies as well as microwave frequencies. In the current scenario small, compatible and affordable microstrip patch antennas are developed in wireless communication industries keep on improving antenna performance. A patch antenna is a narrowband antenna with large beam width. It is fabricated by etching the antenna element pattern in metal trace which is bonded to an insulating dielectric substrate such as a printed circuit board with a continuous metal layer bonded to the opposite side of the substrate known as a ground plane. Fractal geometry is used to reduce the size of patch antenna. Fractal geometries are different from Euclidean geometries which have two common properties: space-filling and self-similarity. It is found that by applying fractal geometry, self-repeating structures are obtained. Fractal geometries that are used in this paper are Koch curve, Minkowski fractal geometry and many other self-similar shapes. By applying fractal geometry on patch, area of patch decreases, resonant length increases and number of frequency bands of antenna increases. Also it is good to achieve wideband characteristics apart from multiband characteristics; hence defected ground structure has been applied to antenna. There are different DGS that can be applied to antenna which include H shaped, plus shaped DGS. It is found that by applying DGS to antenna, characteristics of antenna improved. Radio waves and microwaves play an important role in daily life. Television signals are transmitted by satellite using microwaves, military uses microwave for

surveillance and navigation purposes. Telephone and data signals are transmitted by microwaves. Also in today's scenario, technology demands such an antenna that can operate on different wireless band and must have different features like low cost, less weight, low profile antenna which are capable of maintaining high performance over a chromatic spectrum of frequencies. Microwave spectrum is usually called as electromagnetic spectrum, since it ranges from 1GHz to 100 GHz. There are different microwave bands which are classified into many frequency bands. Applications most commonly used are of range 1 to 40 GHz. Hence different bands within this range are L band (1-2 GHz), S band (2-4 GHz), C band (4-8 GHz), X band (8-12 GHz), K<sub>a</sub> band (12 -18 GHz), K band (18-26.5 GHz) and K<sub>a</sub> band (26.5-40 GHz). Different bands together with their applications are mentioned in table 1.1. Microstrip antenna finds applications from 1 GHz to 12 GHz. Hence microstrip antenna can be designed for L band, S band, C band and X band applications. Standard band designations for microwave frequencies listed as per Institute of Electrical and Electronics Engineering (IEEE) is the industry standards.

## II. ANTENNA DESIGN

### Design Considerations for Fractal Antenna

It is necessary to design antenna in such a way that desired characteristics are obtained. Fractal geometry is applied to antenna so as to obtain multiband characteristics. It is important to take into account size of antenna. If all characteristics are good but size of antenna is large, so antenna will not be much useful. Similarly small size antenna with not good characteristics is not useful. Dimensions of antenna depend on desired frequency of application. If antenna is designed for small frequencies size would be large. Size of antenna also depends on dielectric substrate. If substrate has large dielectric constant, size would be small but efficiency and bandwidth decreases.

### Design of Fractal Microstrip Patch Antenna


Design of T-shaped fractal microstrip patch antenna has been obtained by applying fractal geometry. Patch is taken is known to be square whose dimensions has been calculated as per antenna specifications. Although length of antenna had been rectangular but by parameter optimization, length of antenna has been taken as square.

**Table 1:** Dimensions of Antenna

Variable	Value
Dimensions of Square Patch	36 mm
Dimensions of Square Ground	FR-4
Substrate Used	50 mm
Thickness of substrate	2.4 mm
Feeding technique used	Coaxial Feeding Technique
Substrate used	FR-4
Feed Length of Probe	4mm
Dimensions of Microstrip Feed	2X 7 mm
Feed point	(8, 0, 0)
First Geometry Algorithm	Minkowski Fractal Geometry
Simulation Software	IE3D

Patch length has been taken as square of length 36mm. Dimension of ground has been taken as been taken as 50 mm. The substrate used in this paper is FR-4. This substrate has been chosen to reduce antenna dimension of antenna. Substrate used for this antenna is FR-4 with dielectric constant of 4.4 and loss tangent of 0.02. Table 1 shows dimensions of antenna.

In order to design T-shaped fractal patch antenna for wireless applications, square patch of length 36 mm is taken and operational analysis is applied to it. The geometry corresponding to it is shown in figure 1.(a). This antenna is fed by coaxial feed at point (x=8, y=0) as shown in figure 1(a). Results corresponding to it are analyzed. T shape antenna is designed by making use of cantor fractal and Minkowski fractal geometry. First of all, square of 36 mm is divided into half and one section of 18 mm is taken and 36 mm is divided into 3 parts.

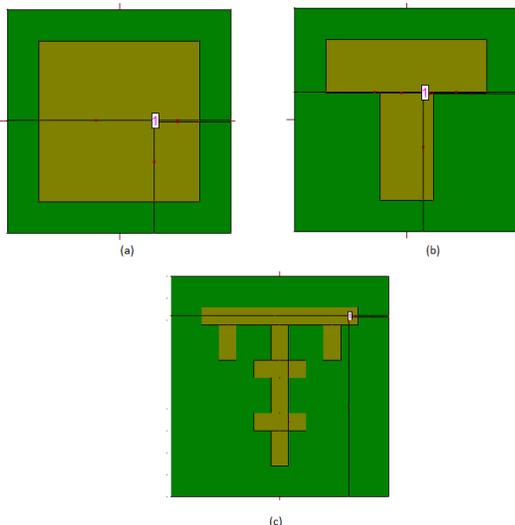

**Fig 1:**T- Shaped FMPA (a) 0<sup>th</sup> Iteration,(b) 1<sup>st</sup> Iteration and (c)2<sup>nd</sup> Iteration

Hence two a rectangle of 18 mm in length and 12 mm in width are removed to form T-shaped patch as shown in figure 1(b). Now four rectangles of dimension 12 X 18 mm are formed hence x axis is divided into three parts and an y into two and two rectangles of dimension 4 by 9 mm are removed from rectangle to form self similar structure as shown in figure 1( c). Geometry shown in figure 1(a), 1(b) and 1(c) shows self similar structures geometry. From above geometries, it is found that as number of iterations increases, self-repeating characteristics are obtained. These also show as number of iterations increases, area decreases. Beyond a certain level of iteration, it is difficult to fabricate antenna as cuts become small which cause difficult for antenna to make practically.


### Parametric Analysis of Proposed Antenna

It has been analyzed that by applying two iterations of fractal geometry, characteristics of antenna improves a lot. Parametric analysis includes making use of feed point change, substrate selection and thickness of substrate. It is found with help of parametric analysis, one may obtain best configuration that has better result. It is also found that results can also be analyzed by changing feed to microstrip line.

- Effect of changing substrate of antenna
- Effect of Changing feeding technique to microstrip line
- Effect of changing thickness of antenna

### Effect of changing Dielectric Substrate

Two iterations of T- shape fractal geometry are applied on square patch to form self-similar structures. FR-4 has been used as substrate. It was found that by using substrate with less dielectric constant, either dimensions of patch increased or frequency shift towards right side. FR-4 was changed to Rogers RT-Duroid as substrate. Coaxial feed has been used as feeding technique and feed point is chosen as (16, 16, and 0). Advantage of using this is that efficiency and gain will improve. Rogers RT Duroid used as substrate is having dielectric constant of 2.2 and loss tangent of 0.0009.Geometry corresponding to it has been shown in figure 2.

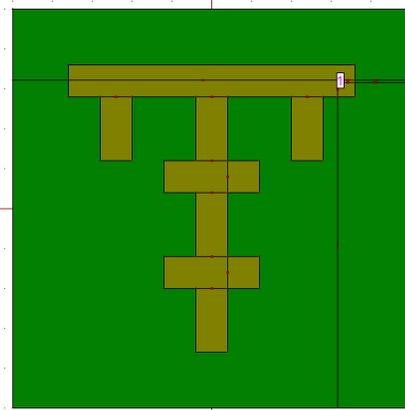

**Figure 2:** Antenna with using Different Substrate


### Effect of Changing Feeding Technique

Proposed T –shape fractal patch antenna has been designed using FR-4 as substrate. There are number of feeding techniques by which patch antenna may be feed. In this paper, antenna was fed by using coaxial feed. It was results can be analyzed by changing feed to microstrip feed. Design of

antenna with microstrip feed and coaxial feed has been. Design of different antenna thickness configuration has been shown in figure

### Effect of Changing Feed Techniques

Proposed T-shape fractal patch antenna has been designed using FR-4 as substrate. It has been found that feed plays an important role in design characteristics. The T shape fractal patch antenna is analyzed by varying feed point. Feed point is selected in such a way that impedance matching takes place. Feed point is important characteristics. Coaxial feed is varied has been shown in figure 3(a), 3(b) and 3(c).

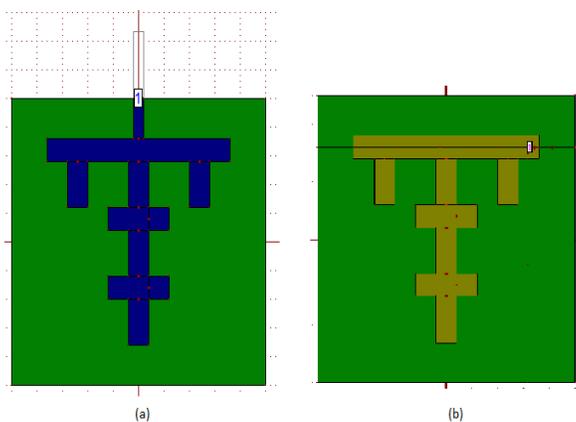


**Figure 3:** T-shaped Fractal Antenna with (a) Coaxial feed (b) Microstrip Feed

## RESULTS & DISCUSSION

### T-Shaped Fractal Patch Antenna


In this section, simulation results of different iterations of fractal geometry are compared. T shape fractal antenna is made by cutting slots as shown in figure 4.2. These cause self-similar T-shaped structure. Return loss vs. frequency for various iteration of T-shaped fractal geometry are shown in figure 5.1.

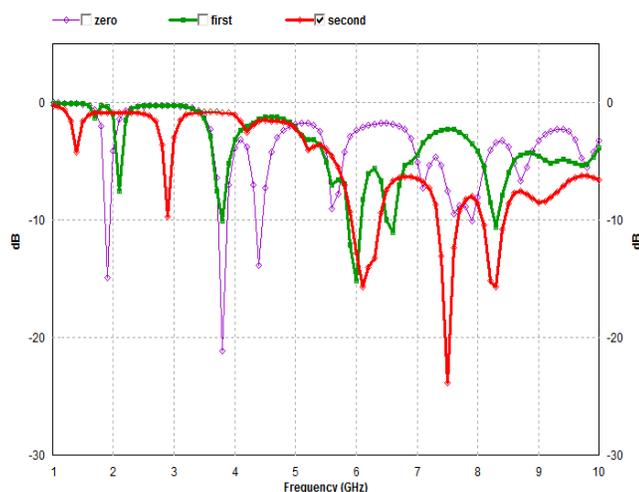


**Figure 5:** Return Loss Vs. Frequency for Different Fractal Iterations of T-shaped FMPA

From figure 5 it is found that characteristics of antenna increases as number of iterations increases, initially square antenna resonates at 2.6GHz, 5.4GHz and 6 GHz with return

loss of -16 dB, -23 dB and -16 dB and bandwidth of 110 MHz, 100 MHz and 125 MHz. since characteristics of antenna at zeroth iteration are not good so fractal geometry has been applied to improve characteristics. Two slots are cut as shown in figure 1(b). This antenna resonates at two bands at 5.4 GHz and 7.10 GHz with return loss of -16 dB and -14.72 dB. This antenna had bandwidth of 180 MHz and 170 MHz at resonant frequency. As results obtained are good but resonant frequency bands are having more return loss hence second iteration of fractal geometry is applied. When second iteration of fractal geometry is applied as shown in figure 1(c), antenna resonates at three bands with return loss of 8.3 GHz, 7.5 GHz and 6.1 GHz. This antenna had return loss of -14.34 dB, -14.40 dB and -25.85 dB with bandwidth of 100 MHz, 110 MHz and 200 MHz at resonant frequencies. Further this antenna has good gain of 3.5dBi, 3.6 dBi and 6.1 dBi at corresponding frequencies. Further radiation patterns at 6.1GHz, 8.3 GHz and 7.5 GHz have been shown in figure 6(a), 6(b), and 6(c).It is found that when one wants to have radiations, there must be acceleration or deceleration of charges, these currents have been refer to time harmonic applications where most charge has been mentioned in transients. In order to have acceleration or deceleration, patch must be having non regular conduction path. It has been found that by making more and more non regular path to antenna, characteristics of antenna become improved. When first iteration of fractal geometry has been applied, effective length of patch increases which result better antenna characteristics.

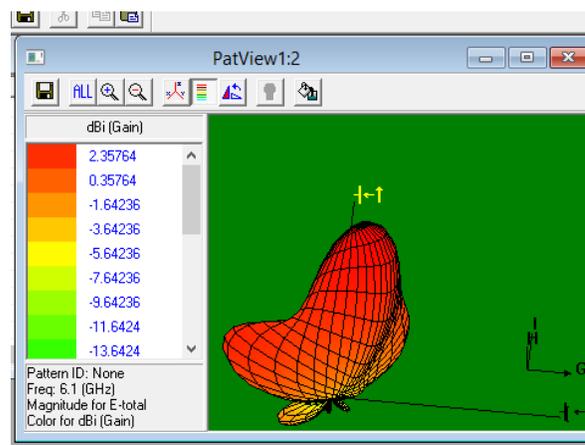


**Figure 6(a):** Radiation Pattern of T-shaped FMPA at 6.1 GHz

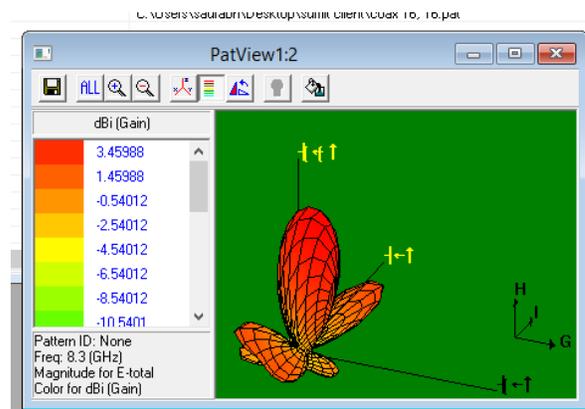

**Figure 6(b):** Radiation Pattern of T-shaped FMPA at 8.3 GHz

When second iteration is applied, number of fractal cuts increases which caused effective length to increase more and more, hence T-shaped fractal antenna in second iteration as shown in figure 1 has good characteristics in terms of return loss, gain and bandwidth. This radiation pattern shows that antenna is having maximum energy corresponds to that in particular direction. There are different radiation patterns like fan based, pencil based radiation pattern.

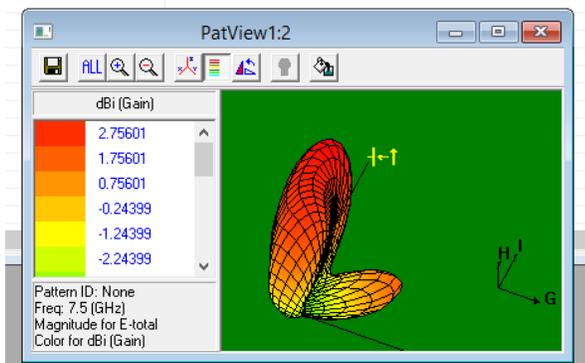

**Figure 6(c):** Radiation Pattern of T-shaped FMPA at 7.5 GHz Table 2 shows comparison of results of different iterations of T-shaped fractal geometry applied on square patch as shown in figure 1. Results are analyzed in terms of return loss and bandwidth. It is found from results that antenna characteristics improves as number of iterations increased. It is found from results that as dimension of antenna increases, result become better. Further it is also found that as one move from first to third iteration, number of bands and bandwidth increases. Voltage standing wave ratio is measure of reflection occur.

**Table 2:** Comparison Results of Different Iterations of T-shaped FMPA

Iteration Number	Resonance Frequency (GHz)	Return Loss (dB)	Bandwidth (MHz)
0 <sup>th</sup> Iteration	1.9	-14.8	70
	3.8	-20.38	150
	4.4	-13.17	80
1 <sup>st</sup> Iteration	6	-15.10	150
	6.6	-11.20	100
2 <sup>nd</sup>	8.3	-10.37	350
	6.1	-15.20	400
	7.5	-22.5	350

When any incident wave travel from input side then at impedance terminal, because of improper matching, waves get reflected hence maxima's and minima's are formed. VSWR is ratio of voltage maxima to voltage minima and must be greater than one.


#### Effect of changing feed Techniques

Parametric analysis has been conducted so as to vary feed point all along axis. By varying feed point it was found that impedance changes. Impedance change occurs as value of

resistance and inductance change take place by varying feed point on peripheral of patch. Feed has given at several points along y axis at (0, 4), (0, 6) and (0, 8). By applying feed to antenna at x=0 and y=6, antenna resonates at 3.9 GHz, 4.5 GHz and 6.1 GHz with return loss of -14.34 dB, -14.40 dB and -25.85 dB.

Iteration Number	Resonance Frequency (GHz)	Return Loss (dB)	Bandwidth (MHz)
Microstrip feed DGS	1.8	-14.10	550
	7.6	-17.20	700
	3.6	-12.10	300
	5.5	-27.10	1000
	6.3	-13.39	400
Microstrip feed	7.5	-20.4	300
	1.8	-11.6	550
	7.6	-14.10	


This configuration had good bandwidth of 100 MHz, 110 MHz and 200 MHz at corresponding frequencies. As feed point shift from y=6 mm to y=4mm, antenna characteristics changed as now antenna resonates at 4.5 GHz with return loss of -17 dB and bandwidth of 100 MHz. By changing feed point to y=8 mm, antenna resonates at 6.1 GHz with return loss of -15.5 dB and bandwidth of 150 MHz. Analysis of results of different antenna configurations have been shown in table 3. It is found that by making such analysis, antenna characteristics become much well. Results of return loss versus frequency loss versus frequency at different feed techniques have been shown in figure 9.

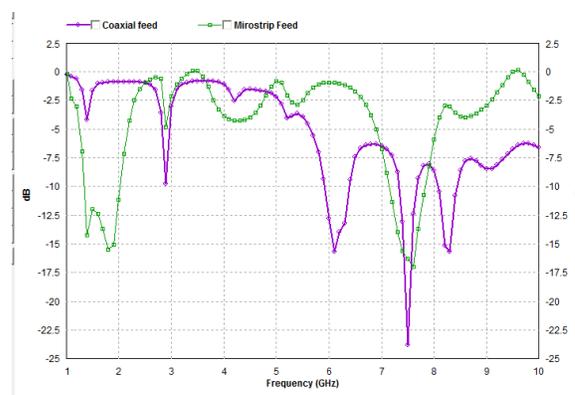


**Figure 9:** Return Loss Vs Frequency for Antenna with Different Feed Point

#### Effect of Varying Substrate Thickness

Effect of varying thickness is observed. As thickness of patch increases, bandwidth and gain increases as electric line of field have to travel extra path from patch to ground. Parametric analysis has been performed by varying thickness. Thickness of substrate has varied for 2.6mm, 2 mm and 2.3 mm as shown in figure

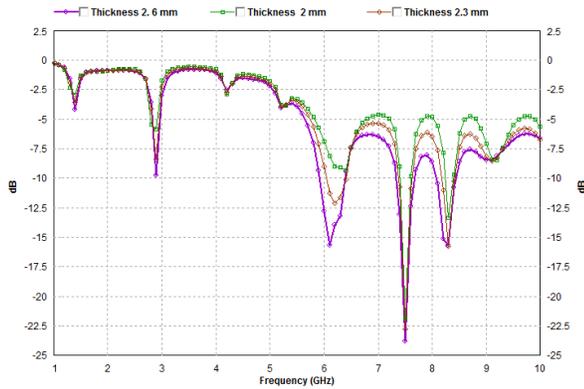

**Figure 11:** Return Loss Vs Frequency for Antenna with Different height

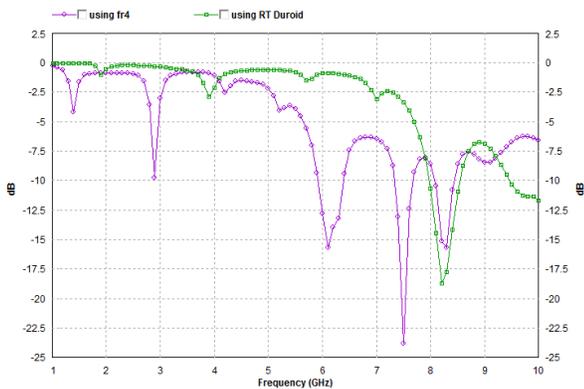

**Figure 12:** Return Loss Vs Frequency for Antenna with Different Dielectric

**Effect of Changing Antenna Height in results**

Different antenna configurations are obtained from parametric analysis, in terms of antenna height, feed points and substrates. By varying thickness of substrate, bandwidth of antenna increases. These are analyzed using IE3D simulation software for substrate thickness of 2.6 mm, 2 mm and 2.3 mm. By using thickness of substrate at 1.8 antennas resonates with return loss of -16.9 dB, -21.5 dB, gain of 2.70 dBi, 2.72 dBi. This antenna had bandwidth of 100MHz, 200 MHz at frequencies 5.3 GHz and 6.2 GHz. By increasing thickness to 2.6mm, antenna resonates at almost same bands but return loss changes. This antenna configuration has return loss of -12.5 dB, -21.5 dB and -20 dB, bandwidth of 100 MHz, 200 MHz and 300 MHz By changing thickness to 2 mm antenna characteristics gives best performance. This antenna has bandwidth of 70 MHz, 170 MHz and 180 MHz This configuration of antenna has gain of 4.07dBi, 4.40 dBi, 4.41 dBi and 3.75 dBi. Return loss versus frequency for different thickness is shown in figure above.

**Table X:** Antenna Characteristics by Height

DIELECTRIC	Resonant frequency	Return Loss	Bandwidth
Thickness 2.6mm	6.1	-15.20	400
	7.5	-22.5	350
	8.3	-16.10	300
Thickness 2 mm	7.5	-21.10	150
Thickness 2.3 mm	8.3	-13.10	150

By changing substrate thickness, characteristics of antenna are compared in terms of antenna parameters which are return loss, bandwidth and gain and are compared as shown in table

**IV. Conclusion**

In this paper discusses results and discussion of Hybrid shaped fractal microstrip patch antenna for wireless applications. Initially square patch is analyzed. It is not having good characteristics, so two iterations of fractal geometry are applied to form T shaped fractal patch antenna. This resonate multiple bands with good bandwidth and gain. Parametric analysis had been carried out by changing substrate feed technique and thickness. Fractal antenna resonated at 6.1 GHz, 7.5 GHz and 8.3 GHz. By using microstrip feed, antenna can be useful for GPS applications and by applying DGS; antenna can be useful for 3.3 GHz and 5.5 GHz with good directivity and gain and can be useful for Wi-Max and WLAN applications

**Reference**

[1] B. Roy, A. Bhattacharya, S.K.Chowdhury, A.K. Bhattacharjee 2016. "Optimization of resonant frequency of a Sierpinski triangular CMPA using genetic algorithm", IEEE antenna and wireless communications letters National Institute of Technology, Durgapur, India, Vol 16.2017

[2] Ashok V, Uma Maheswari S 2016." Miniaturized UWB Microstrip Fractal Antenna",IEEE2016 International Conference on Circuit, Power and Computing Technologies [ICCPCT].

[3] SangeethaVelan, Ester Florence Sundersingh, Malathi Kangasabai, Member, Aswathy K. Sharma, Chinnambeti Raviteja, Ramprabhu Sivasamy, and Jayaram Kizhekke Pakkathillam, 2015. "Dual-Band EBG Integrated Monopole Antenna Deploying Fractal Geometry for Wearable Applications," IEEE antenna and wireless communication letters, Vol 14.

[4] AmrollahAmini, homayoonOraizi, Mohammad Amin ChaychiZadeh, 2015. "Miniaturized UWB Log-Periodic Square Fractal Antenna," IEEE antenna and wireless communication letters, Vol 14.

[5] Shrivishal Tripathi, Akhilesh Mohan, SandeepYadav, 2015. "A Compact Kotch Fractal UWB MIMO Antenna with WLAN Band- Rejection," IEEE antenna and wireless communication letters, Vol 14.

[6] V. Dinesh, Dr. G Karunakar, 2015. "Analysis of Microstrip rectangular carpet shaped fractal antenna", SPACES-2015, Department of ECE, K.L.University.

[7] Pratik Lande, Daison Davis, Nigel Mascarenhas, Freda Fernandes, AshwiniKotrashetti, 2015. "Design and development of printed Sierpinski carpet, Sierpinski gasket and kotch snowflake fractal antenna for GSM and WLAN applications" International conference on technologies for sustainable development (ICTSD-2015).

[8] Yogesh Kumar Choukiker, Satish K. Sharma and Santanu K. Behera, 2014. "Hybrid Fractal Planer Monopole Antenna

Covering multiple Wireless Communication With (MIMO) Implementation For Handheld Devices,” IEEE transactions on antenna and propagation, Vol 62, No. 3, March 2014.

[9] T.Shanmuganatham, S.Raghavan, 2008. “Design Of a Compact Microstrip Patch Antenna With Probe Feeding for Wireless Applications,” International Journal for Electronics and Communication pp. 653-659.

[10] S. Chaimool, C. Chokchai and P. Akkeraekthalin, 2012. “Multiband Loaded Fractal Loop Monopole Antenna For USB Dongle Application,” Electronics letters, Vol 48, No. 23.

[11] Xue-Xea Yang, Bing-Cheng Shao, Fan Yang, Atef Z. Elsherbeniamd Bo Gong, 2012. “A Polarization Reconfigurable Patch Antenna With Loop Slots On Ground Plane,” IEEE antenna and wireless communication letters, Vol 11.

[12] Christos G. Christodoulou, Youssef Tawk, Steven A. Lane, and Scott R. Erwin, 2012. “Reconfigurable Antennas For Wireless And Space Applications,” Proceedings of the IEEE, Vol 100, No. 7.

[13] Vahid Sathi, NasrinEhteshami, JavadNourinia, 2012. “New Frequency-Reconfigurable Microstrip Antenna Composed Of Organic Semiconductor Polymer,” Organic Electronics 13(2012), page 1192-1196.

#### **Authors:**

##### **Er.Parvesh Kumar**

He received his B.Tech degree in ECE from Doon valley engg. College, Karnal, Haryana. His research interests are IPV4 based Network designing, MPLS, MPLS-TP, DWDM, SDH, Radio Access Network, Fractal Antenna, Reconfigurable antenna, Microstrip Patch antenna, Embedded Systems and Network Security. Formally worked as Senior Technical Officer in Electronics Corporation of India Ltd (Department of Atomic Energy). Currently working as Senior Engineer in Bharat Electronics Ltd (Ministry of Defence).

##### **Er.Sumit Kaushik**

He received his B.Tech degree in ECE from Doon valley engg. College, Karnal, Haryana, received his M.Tech from Ambala College of Engineering and Applied Research, Devsthal, Ambala, Haryana. His research interests are IPV4 based Network designing, MPLS, MPLS-TP, DWDM, SDH, Radio Access Network, Fractal Antenna, Reconfigurable antenna, Microstrip Patch antenna. Formally worked as Asst. Professor in LR group of Inst.[Solan], Formally worked as transmission engineer in Hi-tech[Chandigarh]. Formally worked as a Network Engineer in CSS Corp [Gurgaon]. Currently working as Executive Engineer in Bharti Airtel [Gurgaon]. Several papers published in International Journals & IEEE conferences.