



Trial Setup for Hot Machining Process to Increase Tool Life with Torch Flame

Pardeep Singh¹, Pushpender Thakur²
M.Tech Student^{1,2}

Department of Mechanical
Rayat Bahra University, Mohali, India


Abstract:

Presently days, to fulfill mechanical prerequisites we ought to have materials with high hardness and shear quality. So producers are expected to make such materials having high hardness and shear quality. There are different customary strategies for machining, however utilization of such techniques lessens instrument existence with increment in device wear and it brings about increment in cost of assembling. Hot Machining can be utilized to diminish device wear, control devoured and increment surface wrap up. In Hot Machining the temperature of the work piece is raised to a few hundred Celsius above encompassing, which causes decrease in the shear quality of the material. There are different warming techniques, similar to mass warming utilizing heater, zone warming utilizing light fire, plasma bend warming, acceptance warming and electric current opposition warming at device work interface. We utilized light fire strategy for warming the work piece. In this paper exploratory setup of hot machining process is clarified.

I. INTRODUCTION

Managing materials having high hardness and shear quality, Hot Machining can be utilized to diminish instrument wear, control devoured and increment surface wrap up. In Hot Machining the temperature of the work piece is raised to a few hundred Celsius above encompassing, which causes lessening in the shear quality of the material. We are utilizing light fire strategy for warming the work piece since this technique can assist us with heating the work piece material promptly in front of cutting device since burn fire get together moves alongside cutting instrument. Installation we utilized can be mounted on some other machine by minor changes in configuration so

diminishing need of discrete apparatus for every last machine, and it is additionally separable so it won't exasperate standard tasks of machine. From the past examinations it was discovered the power devoured amid turning tasks is fundamentally because of shearing of the material and plastic distortion of the metal expelled. Since both the shear quality and hardness benefits of designing materials diminish with temperature, it was in this way proposed an expansion in work piece temperature would decrease the measure of energy devoured for machining and in the long run increment instrument life. In figure 1(A) and figure 1(B) the variety of Spindle control with Depth of cut is appeared for changed materials.

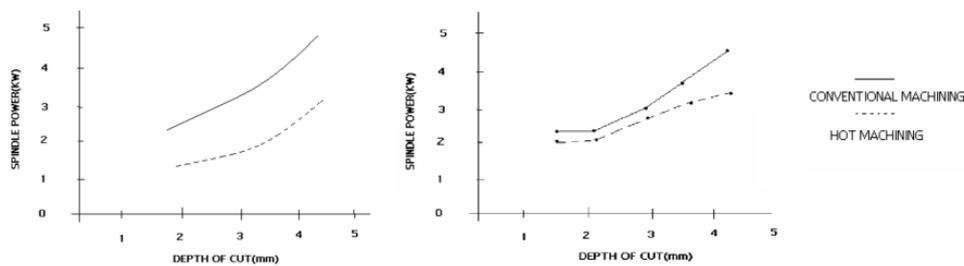

(A) MAT - Alloy steel
Fig.1 Spindle Power Vs Depth of Cut ^[1]

(B) MAT - SSIO

II. PROPOSED WORK

There are different customary strategies for machining, yet utilization of such techniques diminishes device existence with increment in apparatus wear and it brings about increment in cost of assembling. In regular machining techniques as instrument life diminishes devices required for specific material increments, and time require likewise builds brings about lessening in rate of creation. Life of hardware is conversely relative to the assembling cost. So we ought to have a Machining procedure which can assist us with dealing with the materials having high quality and which are difficult to cut.

Hot machining process is ends up being an incredible alternative with utilization of Torch fire technique. We can utilize oxygen-LPG for fire planning.

III. DESIGN AND FABRICATION DETAILS

Basic considerations

The Fixture planned and created ought to be basic, separable, dependable, proficient and reasonable. While planning this apparatus following focuses should be thought about

- There ought to be no perpetual connection to the machine:- The installation ought to be mounted such that it can be expelled as and when we need without influencing some other

course of action on the machine. It ought to be separable. No settled welds ought to be finished with the machine

□ Both the light and thermocouple should move parallel to the machine hub:- The light and thermocouple ought to be mounted such that it should move parallel to the machine alongside the instrument and this movement ought to be controlled by the movement of carriage itself. □ The light ought to likewise move opposite to machine hub:- The light ought to have cross movement to the machine hub i.e. movement opposite to the machine hub and ought to be moved as and when the client needs. What's more, its internal and outward movement ought to be balanced wherever we need.

□ This should be possible physically and in addition via Automation:- All this development of both light and the thermocouple ought to be finished by manual path and in addition via computerization.

Fabrication details:

The primary contemplations made while outlining the apparatus were to lessen the vibration of installation caused



Fig.2 C- Channel



Fig.3 L-Type Plate

The L-type plate: As appeared in Fig. 3 the L-type plate is second essential piece of installation . Its base is given two openings for mounting of C-channel on L plate, this is finished by utilizing nuts, screws and washers for customizable mounting of L plate. The primary face of L plate is penetrated with three unusual openings for fitment of wiper engine and a focal gap is for the arrangement of engine shaft. L plate is

given a guide which directs the nut on the pivoting fastener. 12V DC Motor:- In this exploratory set up a wiper engine as appeared in Fig. 4 is utilized for to and fro development of light. The wiper engine utilized is of Hyundai Accent. It has a speed of 34 rpm and high torque at 2.4 ampere and 12 volt. The engine is then mounted on the L plate. This engine is then associated with the guide jolt. It offers turn to manage jolt.



Fig.4 D.C. Motor



Fig.5 Guide Bolt

Guide Bolt: - A guide jolt is mounted on the wiper engine shaft. Its rotational development along engine shaft causes the forward and turn around movement of nut parallel to wiper engine shaft. Guide jolt is imperative for the forward and invert movement of the warming light as appeared in Fig. 5.

Augmentation for burn mounting: - An expansion for burn mounting is given so the warming light can be clipped legitimately to constrain its development and giving appropriate point to fire to warm the work piece.

The instrument which is utilized comprises of carbide tip As appeared in Fig. 6 which is mounted on a holder. To settle the carbide tip on the apparatus holder we required an Allen scratch which can tight the carbide tip with the device holder. The carbide tip which is utilized as a part of our trial setup is of

ATP review which comprise high measure of carbon and manganese which furnish it with high quality and hardness amid machining. The above indicated fig. 7 is a J-TYPE THERMOCOUPLE which is a sort of temperature sensor. This kind of temperature sensor is a contact write temperature sensor in which does not give perusing without its contact with the material. The temperature of the thermocouple ranges from - 210o C to 750o C which is proper for our trial setup. This thermocouple likewise comprise of a flexible arm which can be balanced by the necessity of the client by simply pivoting the gave handle and it gives the thermocouple a movement same as the safeguard in engine cycle. This thermocouple gives a voltage yield which is in millivolts and has got two terminals one of which is ground and other is certain terminal.



Fig.6 Carbide Tool



Fig.7 J-Type Sensor

IV. AUTOMATION

The computerization encourages Torch development opposite to machine hub and keep temperature at consistent esteem. Above figure demonstrates the fundamental blog chart of mechanization of development of the light opposite to machine pivot. At the point when temperature achieves indicated esteem it will be detected by sensor and light moves from the work piece.

Piece outline appeared in Fig. 8 can be separated in following taps:-

1. Sensor:- Sensor is required to change over the physical amount into the electrical amount. 2. ADC:- ADC is utilized to change over simple flag to advanced, for interfacing with microcontroller.

3. Switches:- Switches are utilized to offer contributions to the microcontroller.

4. LCD:- It is utilized to the status of smaller scale controller and current temperature .

5. Transfer:- It is utilized to begin and stop the engine.

6. Engine:- Motor is utilized as actuator in this undertaking to move fire front and back.

7. Microcontroller:- It is the core of the framework which process the signs and take choice as indicated by program stacked.

8. Power source:- It is utilized to offer energy to every one of the components utilized as a part of circuit.


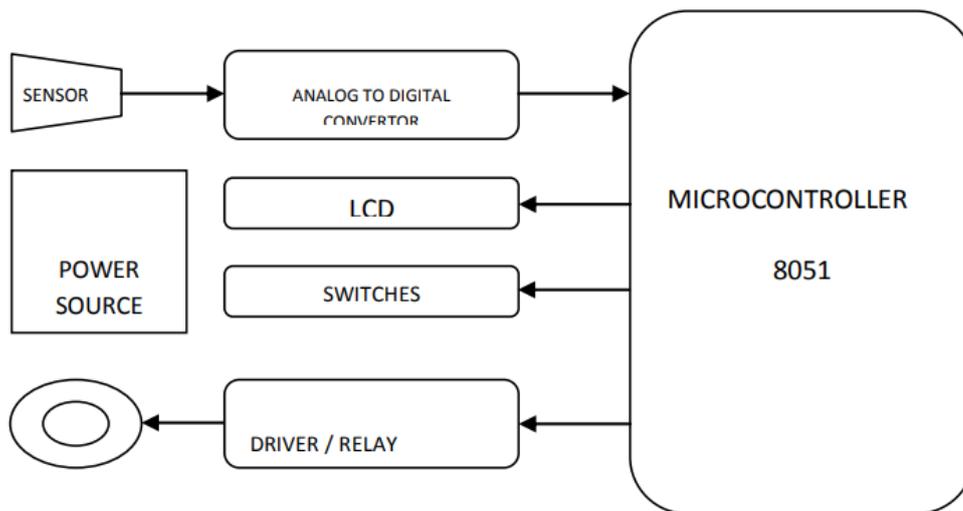


Fig. 8 Block Diagram of Automation

V. EXPERIMENTAL SETUP

The cry fig. 9 comprises of the Experimental Setup which we have executed. Work piece is mounted

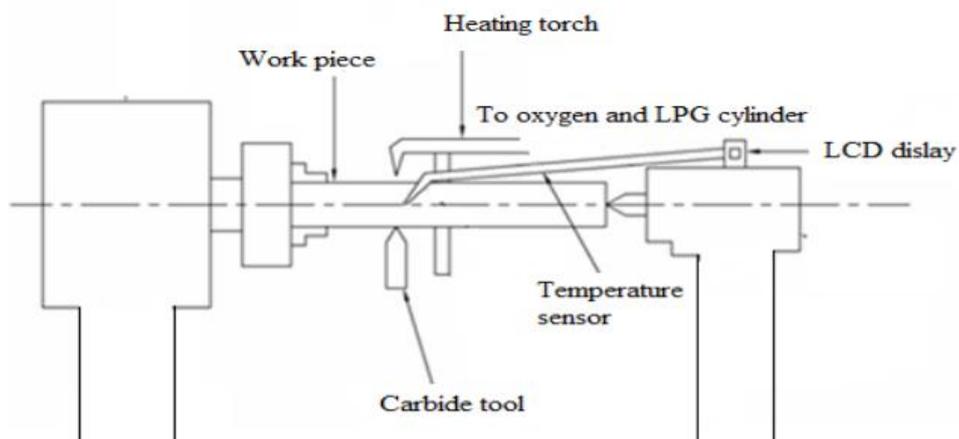

Between machine headstock and tail stock, and before device carriage the apparatus is mounted. Fig.9 Experimental Setup This trial setup for the most part comprises of eight vital segments and they are as per the following:-

- 1] Lathe Machine.
- 2] Work piece
- 3] Carbide Tool.
- 4] Heating Torch.
- 5] J-Type Thermocouple
- 6] Oxygen Cylinder.
- 7] LPG Cylinder.
- 8] LCD Display

VI. WORKING:

The work piece is held, between the machine head stock and tail stock on the machine. As appeared in fig. 9 burn is fitted.

Light is associated with LPG barrel and an oxygen chamber. Light can move with the cutting instrument. We can modify the stream of oxygen and LPG by utilizing valves. Handle is given to modify the separation of the light spout and it should be possible naturally with DC engine. Temperature marker can gauge the temperature of the work piece. Temperature can be set in the temperature pointer and when the temperature is achieves the predefined esteem the light naturally moves from the work piece. This is finished by utilizing the computerization s gave and temperature sensor detects the temperature and physical amount is changed over into electrical amount and thus the development of the light is finished with the assistance of 10 volt DC engine. The machining is finished by a carbide apparatus embed as appeared in the Fig. 6. Fig.9 indicates working setup for the hot machining process utilizing oxygen and LPG gas flares. Fig. 10 Shows real setup.



Fig.10 Actual Setup

VII. CONCLUSIONS

So Hot Machining is effective machining process for difficult to cut materials. So we mounted installation on to the machine carriage, Oxygen and LPG fire is utilized. The primary target of this exploratory setup is to machine the high quality difficult to cut materials via carbide apparatuses with increment in instrument life and lessening the device wear which is accomplished. The development of the light has been effectively done physically and also with the assistance of computerization. The trial was done on the high Mn steel and this difficult to cut material has been effectively machined. At long last in future test will be hurry to check the enhancement of cutting parameters and the ideal benefits of cutting velocity, Feed, Depth of Cut and Temperature acquired can be looked at, in order to get advanced qualities.

VIII. REFERENCES

- [1]. Mukherjee, P.N., Basu, S.K., 1973. Statistical evaluation of metal cutting parameters in hot machining. *Int. J. Prod. Res.* 2, No-1-21-36.
- [2]. N.Tosun,L.Ozler,2002,A study of tool life in hot-machining using artificial neural networks and regression analysis method, *J. Material processing technology* 124,99-104.
- [3]. N. Tosun ,L. Ozler, 2004, Optimization for hot turning operations with multiple Performance characteristics, *Int J AdvManufTechnol* 23, 777– 782.
- [4]. K.P. Maity, P.K. Swain, An experimental investigation of hot machining to predict tool life, *Int. J. of Materials processing technology* 19 8 (2008) 344–349.

[5]. Rozzi, J. C. , Pfefferkorn, F. E., Shin, Y. C., and Incropera, F. P., "Experimental Evaluation of the Laser Assisted Machining of Silicon Nitride Ceramics.", *Journal of Manufacturing Science & Engineering, Transactions of the ASME*, Vol. 122, Iss. 4,

[6]. Ozler, L., Inan, A., Ozel, C., 2000. Theoretical and experimental determination of tool life in hot machining of austenitic manganese steel.*Int. J. Mach. Tool & Manuf.* 41,163–172.