



Experimental Study on Fresh and Hardened Properties of Concrete by Incorporating Flyash, Metakaolin & Brick Powder By Partial Replacement of Cement for M40 Grade Concrete

M. Yedukondalu Reddy¹, A.Chandana Jyothi², P. Silus³
M.Tech Scholar¹, Assistant Professor², Associate Professor³
Department of Civil Engineering
Chebrolu Engineering College, Chebrolu, Guntur, India

Abstract:

The present dissertation is on replacement of fine aggregate, as metakaolin, brick powder & fly ash, in this present construction concrete world the natural resources are undergoes to depletion and wastage of various materials are increased day by day. The construction growth also increased due to the heavy population .in this present manuscript the various materials are used as fine aggregate and check the concrete characteristics at various curing periods and know the behavior of the concrete. In this present study deals with the strength properties of concrete by using flyash,metakaolin& brick powder as partial supplements for fine aggregate at 0,5,10,15,20 at various curing periods 7,28,56 days. The use of materials in cement concrete

- a) Materials will modify properties of the concrete
- b) Control the concrete production cost
- c) To overcome the scarcity of fine aggregate
- d) clever usage of waste materials

I. INTRODUCTION

Concrete is an artificial material in which the aggregates both fine and coarse are bounded together by the cement when mixed with water. The concrete has become so popular and indispensable because of its inherent characteristics and advantages either when green or hardened. The use of reinforcement in concrete has brought a revolution in applications, design and construction techniques. Its great versatility and relative economy in filling wide range of needs has made it a very competitive building material. The most important pozzolonic materials are fly ash, and metakaolin ,brick powder whose use in cement and concrete is thus likely to be a significant achievement in the development of concrete technology in coming few decades. So, we have to search for different materials to reduce the quantity of basic natural materials in the concrete mix without changing any mix design procedure and considerations. We cannot replace the whole basic material in the concrete, but some extent we can replace with other materials. There are some research were done on waste materials which are very near to our surroundings like , Stone dust, over burnt bricks, M – sand , brick powder, coconut shells, waste tyres, slag, fly ash produced from industries, broken glass pieces, rich husk ash, coconut shell ash, etc. to use them in concrete mix along with basic natural aggregates. In their methodologies, some of the above materials were used to replace the cement and some of the materials used to replace the aggregate. In those researches observed that these materials can be used in some extent percentages. In those experimental studies, by testing the concrete samples with 0% 5%, 10%, 15%,20% etc., replacement of basic material with waste material, estimated the optimum percentages of wasted materials can use in the concrete mix. But there are some problems faced with these materials like improper mix with other materials, lack of bonding in concrete due to smooth surface, for some materials

there is a strength decrement when compared to the conventional mix due to less toughness when compared to the basic aggregates etc. These are the main drawbacks when using other materials as an aggregate in concrete mix. When mixing the concrete, observed that there is an improper bonding of plastic materials with cement and other aggregates in concrete mix. This problem was faced because, plastic material having smooth surface and lack of angularity in them. And when compressive strength test conducted after 7,28,56 days curing period on these cube sample, observed that there is decrement in compressive strength when compared to the conventional mix.

II. OBJECTIVES:

The objectives of this study are as follows

- a) To investigate the best mix proportion of the partial replacement for fine aggregate in concrete cement in concrete.
- b) To investigate the feasibility of the partial replacement of above material in concrete by determining the destructive and non-destructive tests
- c) Based on the test results, to suggest most approximate level of adding brick powder & fly ash , metakaolin

SCOPE OF THE STUDY

The scope of study is to establish to achieve the objectives and this study will be mainly concentrated on experimental works. Experiments regarding compression strength and split tensile strength on the partial replacement brick powder, metakaolin, flyash in concrete will be carried out in order to study the behaviour of concrete. All testing methods and procedure are specified according to Indian Standards

III. LITERATURE REVIEW

Praveen Kumar.M Shows that the Experiment is explained that the brick powder and fly sh is replaced 10%,20% and 30% by cement in concrete in addition with 5%,10%,15% of

weight of cement. The brick powder replacement is sufficient enough for getting higher strength. The flexural strength of concrete increases with the addition of powder. The Split tensile strength of the powder concrete decrease with the addition of brick powder.

Olanitori LMet.al., (2015) Shows that the experiment is explained that using a mix design ratio of 1:2:4 and water binder ratio of 0.63 concrete cubes were casted using varying Ordinary Portland Cement: Palm Kernel shell ,fly ash & Ordinary Portland cement: coconut shell ash ratios of 100:0, 90:10, 80:20, 70:30, 60:40, & 50:50 respectively. Reducing the production cost and the environmental pollution caused by the dumping of the agricultural waste.

Nekel and netaa et.al., (2015) Explained that the experiment is explained that the replacing the cement by fly ash and bricks 5%, 10%, 15% and Fine aggregate by Rubber (CR) 2.5%, 5%, 7.5% & 10%. The compressive strength of concrete decreased with increase in varying percentage of Crumb rubber. Result of Replacing cement by 5% brick powder in 10% Crumb Rubber replaced concrete shows increase in both flexural and split tensile strength.

Sukaa ,nikka ,mull K, et.al., (2014) Explained that the experiment is explained that the cement is partially replaced with brick powder as 5%, 10%, 15%, 20%, 25%, 30% by weight of cement. specified in their research journal the combined replacements are very useful in the present era of construction .the waste materials are very badly cumulated on earth these used as replacements for concrete fine aggregates ,

AMARNATH YERRAMALA et.al., (2014) studied the Properties of concrete with eggshell powder as cement replacement. This paper describes research into use of poultry waste in concrete through the development of concrete This literature review deals with related to studies on Blended Concrete and Effects and performance of concrete with mix with the fly ash brick powder, & metakaolin During the year ago, hardly anybody in India was aware of the use of metakaolin, fly ash and brick powder in concrete. the developments that have taken place and increased awareness of production of metakaolin in the country, the replacement materials are very rarely used start of indigenous commercial production and many investigations on the development of concrete mixes containing metakaolin.

METAKAOLIN & FLY ASH

The uses of using metakaolin or fly ash separately in concrete as partial replacement for Portland cement are fairly well-established, especially for fly ash. However, because the cost of metakaolin is about 4-5 times the cost of ordinary Portland cement, thus using metakaolin is a supplementary cementitious material (SCM) may not be cost effective. On the other hand, the slow reaction rate of fly ash can make its use impractical when rapid early strength development is required

The Effect Of Metakaolin improving The Concrete Compressive Strength This paper shows the performance of metakaolin (MK) on compressive strength and durability of concrete. It can decrease permeability, increase tensile strength, and concrete durability.

M.Sree and et al the increment of metakaolin increase the properties of concrete at various percentages with combination cement and fine aggregate (2001 & 2009).

Stuart & hog (2016) specified in their research journal the combined replacements are very useful in the present era of construction .the waste materials are very badly cumulated on earth these used as replacements for concrete fine aggregates ,

Robert and mullack in the experimental studies so that the split tensile strength results very satisfactory .the compressive

strength at various days 56 the results giving very good and very less at 30 % replacements .so the fine aggregate content and water cement ratio are the major reasons

IV. FRAME WORK OF THE THESIS

Introduction

The first chapter, of introduction discusses about the concrete materials which are using in the present study i.e., Brick Powder, Metakaolin, Fly ash, Fine Aggregate, Coarse Aggregates and Super Plasticizers.

Literature Review

The second chapter deals with the review of previous research works on various aspects of Brick Powder, Metakaolin and Fly ash concretes.

Experimental Investigation

The third chapter provides material characteristics and procedures for evolving concrete mixes with Brick Powder, Metakaolin and Fly ash in varying percentages. The important parameters studied are compressive strength, split tensile strength and Ultrasonic pulse velocity test of concrete etc.,

Experimental Results in the form of tables

The chapter contains the information regarding the experimental work; results were reported in the form of tables and graphs.

Analysis of data by using Graphs and Discussions of the tests

The chapter contains the information regarding the experimental work; results were reported in the form of graphs and their discussions of the graphs.

Replacement materials:

FLYASH POWDER:

Fly ash, a principal by-product of the coal-fired power plants, is well accepted as a pozzolonic material that may be used either as a component of blended Portland cements or as a mineral admixture in concrete.

Advantages of Using Fly Ash

1. Fly ash generally can make more workable and can improve finishing.
2. Fly ash can reduce the heat of hydration and delay setting times reducing thermal stresses in early age concrete.
3. Fly ash can increase the ultimate strength of concrete.
4. Fly ash can make concrete more durable, particularly to mitigate ASR and sulphate attack.
5. Fly ash reduces the CO₂.
6. Using Fly ash in concrete reduces disposal problems and also underground contamination

Metakaolin

Metakaolin is that the one of the innovative clay products developed in recent years. it's made by controlled thermal treatment of kaolin. Metakaolin are often used as concrete constituent, substitution a part of the cement content since it's pozzolanic properties. the utilization of Metakaolin as a partial replacement material in mortar and concrete has been studied wide in recent years. Study is required to see the contribution of Metakaolin (MK) to the performance of hardened concrete. There are great considerations on the strength and durability of Metakaolin-concrete once used as construction materials within the construction industries. If it's established that the concrete is durable and powerful, this can result in use of Metakaolin to exchange a part of the cement.

Advantages of Using Metakaolin

1. Increased compressive and flexural strengths
2. Increased resistance to chemical attack

- 3. Reduced permeability
- 4. Reduced effects of alkali-silica reactivity (ASR)
- 5. Improved finish ability, color and appearance

Waste Brick Powder

Bricks are a wide used construction and building material around the world. In developing countries bricks are still one amongst the most common construction materials. India is that the second largest producer of fired clay bricks when china.


Bricks are a wide used construction and building material around the world. The waste brick utilized in the current. Waste brick powder is used as a cement substitute.

Concrete Mix Design

Concrete Mix Design of grade M 40 has been done as per of the recommended guidelines of IS: 10262-2009. The weight ratio of mix proportion is **1:1.89:3.29** keeping water cementitious ratio as 0.38.

Compressive strength results:

% of METAKAOLIN + FLYASH + BRICK POWDER			7DAYS
0 %	0 %	0 %	30.15
5%	5%	5%	31.80
10%	10%	10%	31.89
15%	15%	15%	24.00
20%	20%	20%	25.21

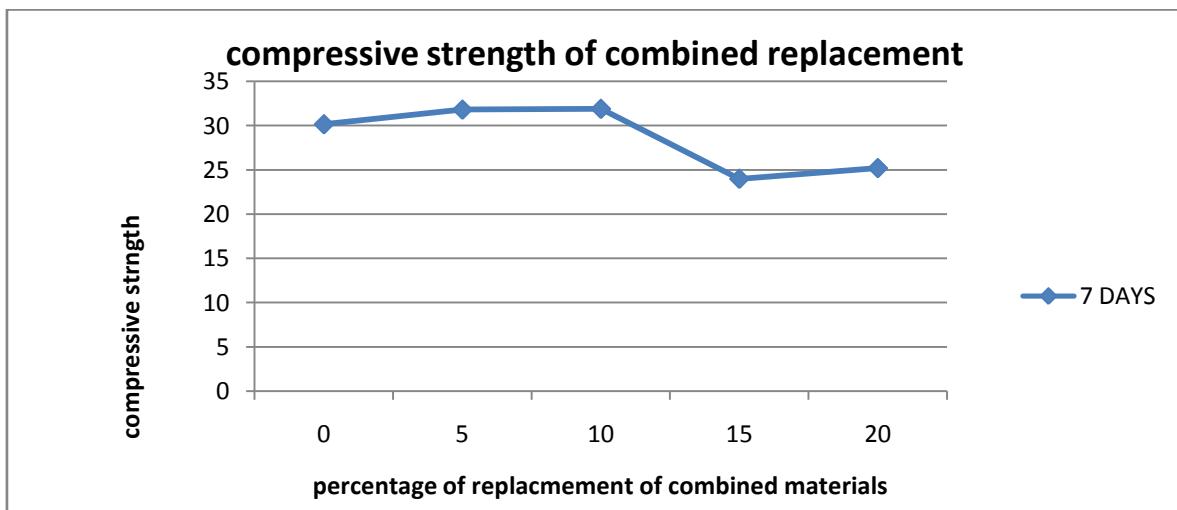


% of METAKAOLIN + FLYASH + BRICK POWDER			28 DAYS
0 %	0 %	0 %	48.00
5%	5%	5%	49.3
10%	10%	10%	49.32
15%	15%	15%	42.85
20%	20%	20%	41.00

SPLIT TENSILE STRENGTH RESULTS :

% of METAKAOLIN + FLYASH + BRICK POWDER			7 DAYS
0 %	0 %	0 %	4.91
5%	5%	5%	5.46
10%	10%	10%	5.84
15%	15%	15%	5.98
20%	20%	20%	6.13

% of METAKAOLIN + FLYASH + BRICK POWDER			28 DAYS
0 %	0 %	0 %	7.41
5%	5%	5%	7.86
10%	10%	10%	7.89
15%	15%	15%	7.94
20%	20%	20%	8.12

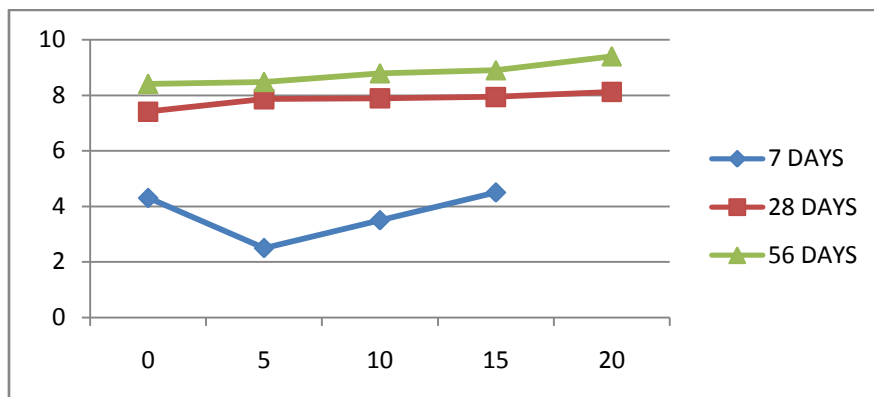

ULTRASONIC PULSE VELOCITY TEST

S NO	% METAKAOLIN	Obtained average velocity(m/s)	Quality of Concrete
1	0	4512	EXCELLENT
2	5	4523	EXCELLENT
3	10	4531	EXCELLENT
4	15	4600	EXCELLENT
5	20	4521	EXCELLENT

S NO	% OF FLY ASH	Obtained average velocity(m/s)	Quality of Concrete
1	0	4524	EXCELLENT
2	5	4532	EXCELLENT
3	10	4590	EXCELLENT
4	15	4621	EXCELLENT
5	20	4444	GOOD

S NO	% OF BRICK POWDER	Obtained average velocity(m/s)	Quality of Concrete
1	0	4234	Good
2	5	4590	EXCELLENT
3	10	4627	EXCELLENT
4	15	4676	EXCELLENT
5	20	4578	EXCELLENT

S NO	% OF METAKAOLIN+FLYASH+BRICK POWDER	Obtained average velocity(m/s)	Quality of Concrete
1	0	4570	Excellent
2	5	4579	Excellent
3	10	4794	Excellent
4	15	4798	Excellent
5	20	4800	Excellent

V. DISCUSSIONS:

- 1) Metakaolin and flyash are the effective replacements and results in enhanced early strength and ultimate strength of concrete.
- 2) The compressive strength of hardened concrete, i.e., 7, 28 days is improved by blending the OPC with 10%, 15 %, of metakaolin, flyash, brick powder by weight.
- 3) The 10% replacement with metakaolin is the most optimum replacement, enhancing the concrete's compressive strength at all ages.
- 4) The 28-days compressive strength of concrete was improved by partial replacements of OPC by metakaolin in the range up to 10% by weight, and was at the 20% level still maintained. The highest 28-days strength improvement of concrete can be expected at partial replacements in the 10-15% range.
- 5) The combined use of metakaolin and a super plasticizer allowed increasing the aforementioned partial replacement levels, i.e. to 10 %,15 % in the case of maintaining strength.
- 6) Ternary blending by Metakaolin in combination with Fly Ash, & brick powder was found leading to further technical improvements to concrete strength.
- 7) Fly ash is low cost material which is useful to cast concrete slabs and further when combined with the ternary blends.
- 8) The split tensile strength results are also satisfactory when replacements of MATERIALS (M,F,& BP)
- 9) Non-destructive test also gives the optimum results when tested
- 10) Overall performance of the concrete is very good with three replacements.
- 11) Only disadvantage is three partial supplements for fine aggregate.

VI. REFERENCES

- [1]. Antiohos, S.; Maganari, K.; and Tsimas, S., "Evaluation of Blends of High and Low Calcium Fly Ashes for Use as Supplementary Cementing Materials," Cement and Concrete Research, Vol. 27, 2005, pp.349-356.
- [2].A.Sadr Momtazi, M. M. Ranjbar, F. Balalaei, R. Nemati, "The effect of Iran's metakaolin in enhancing the concrete compressive strength"
- [3]. A.K. Mullick. "Performance of Concrete with Binary and Ternary cement blends." The INDIAN Concrete Journal, January 2007.
- [4].A.Elahi, P.A.M.Basheer, S.V. Nanukuttan, Q.U.Z.Khan." Mechanical and Durability properties of high performance concrete containing Supplementary cementitious materials." Construction of Building materials 24(2010) Pg 292-299.
- [5].Bai, Jiping; Gailius, Albinas, "Consistency of fly ash and metakaolin concrete" Journal of Civil Engineering and Management 2009
- [6].Dhir, R.K. and Jones, M.R, "Development of Chloride-Resisting Concrete Using Fly Ash" Fuel, Vol. 78, 1999, pp.137-142.
- [7].Jelica Zelic, Ivana Radovanovic, Drazan Jozic. "The Effect of silica Fume additions on the Durability of Portland

Cement Mortars Exposed to Magnesium Sulphate Attack". Materials and Technology 41 (2007), Pg 91-94

- [8].Lane, D.S.; and Ozyildirim, C., "Preventive Measures for Alkali-Silica Reactions (Binary and Ternary Systems)", Cement and Concrete Research, Vol. 29, 1999, pp.1281-1288.
 - [9].Moser, Robert D, Jayapalan, Amal R, Garas, Victor Y And Kurtis, Kimberly E, Assessment of Binary and Ternary Blends of Metakaolin and Class C Fly Ash for Alkali-Silica Reaction Mitigation in Concrete, Cement and Concrete Research, pp. 1664-1672.
 - [10]. Ong, Chee Huat (2006) Performance of concrete containing metakaolin as cement replacement material.
 - [11].R. D. Neves and J. C. O. Fernandes de Almeida, Compressive behavior of steel fiber reinforced concrete, pp 2-3
 - [12].Roland Bleszynski, R. Doug Hooton, Michael D.A Thomas, and Chris A. Rogers " Durability of Ternary Blended concrete with Silica Fume and Blast-Furnace Slag: Laboratory and Outdoor Exposure Site Studies". ACI materials journals September-October 2002.
 - [13].IS 10262-2009: Indian Standard "Guidelines for concrete mix design proportioning" –
 - [14].code of practice
 - [15].2. IS 456 – 2000: Indian Standard "Plain and reinforced concrete" – code of practice
 - [16].3. IS 13311 part 1 – 1992 : Method of Non – destructive testing of concrete, part1:
 - [17].Ultrasonic pulse velocity
 - [18].IS 383 – 1970: Indian Standard "Specification for coarse and fine aggregates from
 - [19].natural sources for concrete"
 - [20].“CONCRETE TECHNOLOGY” Theory and practice, A text book by M.S.Shetty, 2005.
 - [21].Dayalan. J, Beulah. M, "Effect of Waste Materials in partial replacement of cement fine
 - [22].aggregate and coarse aggregate in concrete", International Journal of Inventive
 - [23]. Engineering and sciences, ISSN:2319-9598, Issue-4, March 2014
- ### LIST OF REFERRED INDIAN STANDARD (I.S) CODE BOOK
1. I.S. 12269-1989 Specifications for 53 grade ordinary Portland cement.
 2. I.S. 3812-1981 IS Specification for flyash for use as puzzolona & addl material
 3. I.S. 383-1970 Specification for Coarse and Fine Aggregate from Natural sources for concrete.
 4. I.S. 456-2000 Indian Standard Plain Reinforced Concrete- code of Practice.