



# Modeling Simulation and Analysis of Aluminium Silicon Carbide Composite System

Dr. C. N. Chandrappa<sup>1</sup>, Shivaprasad. K<sup>2</sup>, R. Kumar<sup>3</sup>  
Professor<sup>1</sup>, Research Student<sup>2</sup>, Assistant Professor<sup>3</sup>  
Department of Mechanical

Acharya Institute of Technology, Bangalore, India<sup>1</sup>  
Ramaiah Institute of Technology, Bangalore, India<sup>2,3</sup>

## Abstract:

In the present industrial scenario composite material are given the first preference due to its high strength and less weight ratio. Conventional materials like steel, brass, and aluminium etc. Will fail without any indication, crack initiation; propagation will take place within short span. To overcome this problem conventional materials are replace by aluminium alloy and its composites. In this project work Aluminium Alloy 6061 is selected as matrix material and Silicon Carbide as reinforcement material based on literature review. Fabrication of composite is done by Stir Casting method. Tensile specimens are prepared according to ASTM E08M standards and testing was done under tensometer at room temperature. Finite element method (FEM) is used to simulate the tensile test in ANSYS workbench to identify the occurrence of stress distribution, deformation and elongation etc., without investing much during the initial phase of the product development. Validation of mechanical results with analytical result is done to know the percentage of error associated. Statistical tools like correlation and regression is used to generate regression equation to predict the unknown properties (output) by varying the input variables.

**Keywords:** Aluminium Silicon Carbide (AlSiC), ANSYS Workbench, Finite Element Analysis (FEA), Metal Matrix Composites (MMC's), Stir Casting etc.

## I. INTRODUCTION

Many of the engineering applications in today's world wants materials with extraordinary mechanical properties that cannot be fulfill by conventional materials like metals, polymers or ceramics. Mechanical properties of materials play a major role, especially in the field of Aerospace and Transport applications. New classes of materials called "composite materials" are capable of producing desired properties to meet the industrial needs. The final outcome of any composite material should be of light weight, longer life span and cost effective. The mechanical property of composites depends on fabrication technique and percentage of reinforcement added to matrix material. In present work Aluminium Alloy 6061 is reinforced with Silicon carbide in different wt. (5%, 10%, 15% and 20%) ratios to fabricate AMMCs through stir casting technique. Tensile test is carried out, to know the improvement in tensile properties of AMMCs. Improve in tensile strength is one of the key reason they are widely used in industrial prospectus.

## II. OBJECTIVES

- 1) To fabricate AlSiC MMCs by stir casting technique.
- 2) Preparing tensile specimen according to ASTM standards by machining.
- 3) Simulation of tensile tests through ANSYS workbench (FEA).
- 4) Comparing the experimental results with analytical results to determine the percentage of error.
- 5) Implementation of statistical tool to experimental results, correlation and regression analysis to determine the formula that fits the relationship between the variables and strength of relationship between them.
- 6) Expressing results through tables and graphs.

## III. MATERIALS AND METHOD OF FABRICATION

### 3.1 Matrix Material

AA 6061 is selected as matrix material. AA 6061 is one of the most widely used of the 6000 series Aluminium Alloy. AA 6061 series contain silicon and magnesium in order to form magnesium silicate. The chemical composition and Properties of AA 6061 is tabulated below.

**Test Method:** ASTM E 1251-2011.

**Equipment Used:** Optical Emission Spectrometer BAIRD DV6.

**Table 3.1:** Chemical Composition of Aluminium Alloy 6061

Element	Cu	Si	Fe	Mn	Ti	Zn	Cr	Mg	Al
% Weight	0.282	0.728	0.183	0.027	0.171	0.053	0.235	0.999	97.322

### 3.2 Reinforcement Material

Silicon Carbide is selected as reinforcement material; 'Carborundum' is an alternative name of Silicon carbide with a chemical formula SiC. Present days is widely used as reinforment in Composites preparation and good abrasive. In Present work SiC partial size of 400 Mesh (37 micron) have been used.

**Table 3.2:** Mechanical Properties of SiC and Aluminium Alloy 6061

Properties	SiC	AA 6061
Elastic Modulus (GPa)	410	70-80
Density (g/cc)	3.1	2.7
Poisson's Ratio	0.14	0.33
Hardness (Kg/mm <sup>2</sup> )	2800	95
Modulus of Rigidity (GPa)	140	26
Shear Strength (MPa)	-	83
Tensile Strength (MPa)	390	115

### 3.3 Stir Casting (Fabrication Process)

Stir casting is most commonly used method to produce MMCs because of its simple procedure and cost effectiveness. In this process Pre weighed AA 6061 was fed in to electric furnace set-to 700°C. The experimental setup show in figure. After melting of Al 606, magnesium powder as wetting agent and hexachloroethane (C<sub>2</sub>Cl<sub>6</sub>) as degasing agent added to remove entrapped gases. Pre heated reinforcement (SiC) up to 300°C is slowly added to molten matrix with manual stirring and then by motor operated mechanical stirrer with speed of 300 rpm for a period 10 minutes. After uniform distribution of SiC in molten AA 6061, the mixture is slowly poured to pre-heat die to 300°C and cooled to room temperature. Casting is separated form mould and finishing is done. The same procedure is repeated to produce AlSiC MMCs of different weight ratios- 5%, 10%, 15% and 20%

**Table 3.3:** Process Parameters of Stir Casting

Parameters	Specifications
Pre-heating of SiC and Die	300°C
Stirring Time	10 minutes
Stirring Temperature	700°C
Pre-heating time of SiC and Die	60 minutes
Furnace Temperature	700°C
Stirring speed	300 rpm

## IV. EXPERIMENTAL DETAILS

Tensile test is the most commonly used mechanical test on the material because of its simple, relative inexpensive and fully standardized. Where pulling load is applied at the terminals of the specimen to find its strength along with how much it will be elongated. The loading is continued until the material breaks to get tensile complete profile. Curve shows how the material goes on elongation on loading, the point at which the material fails called “Ultimate Strength”/ultimate tensile strength (UTS) on the curve. The slope of Stress-Strain curve gives the young’s Modulus “E”.



**Figure 4.1.** Tensometer




**Figure 4.2.** Tensile Specimens Before and After Test

## V. RESULTS AND DISCUSSIONS

### 5.1 Tensile Strength

**Table 5.1:** Tensile Strength of AMMCs Tensile Specimens

% of SiC in AA 6061	0%	5%	10%	15%	20%
Tensile Strength (N/mm <sup>2</sup> )	102.56	120.23	84.1	121.56	124

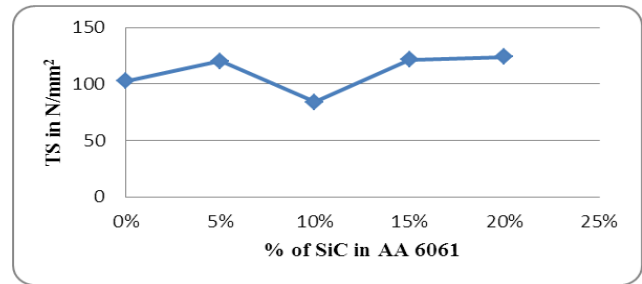


**Figure 5.1.** Ultimate Tensile Strength of AlSiC MMCs

Figure 5.1 shows the variation of Ultimate Tensile strength as a function of % SiC in AA 6061. As seen from the graph, at 0% SiC, UTS is found to be 102.56 which drastically increase to 120.23 at 5% SiC, due to addition of reinforcement. There is a drastic reduction in UTS at 10% SiC which may be due to segregation of SiC in tensile test specimen. Thereafter it again increases at 15% and 20% SiC, due to increase in percentage of SiC in AA 6061 matrix.

### 5.2 Displacement

**Table 5.2:** Displacements of AMMCs Tensile Specimens

% of SiC in AA 6061	0%	5%	10%	15%	20%
Displacement (mm)	1.48	1.36	1.95	1.37	1.3

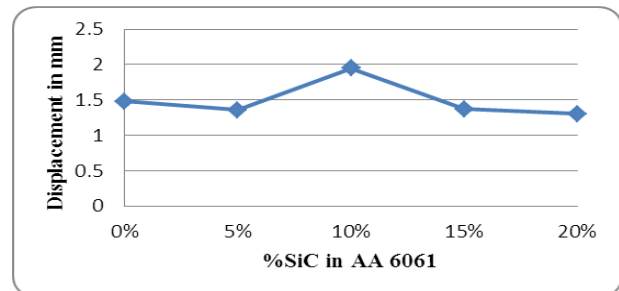

**Figure 5.2.** Displacements of AMMCs Tensile Specimens

Figure 5.2 shows the variation of displacement as a function of % SiC in AA 6061. The displacement at 5% SiC is less than that at 0% SiC. But the displacement is found to be maximum at 10% SiC, which may be attributed to segregation of SiC in AA 6061 matrix. While on contrary, the values have dipped at 15% and 20% SiC. The decrease in displacement may be due to increase in percentage of SiC or decrease in elasticity.


## VI. SIMULATION OF TENSILE TEST

Steps involved in simulating tensile test in FEA Software,


1. Create or import 3D CAD Model
2. Define the material properties
3. Mesh the CAD Model
4. Apply the boundary conditions
5. Define the type of load
6. Solve



**Figure.6.1.** CAD Model



**Figure.6.2.** Meshed Model



**Figure.6.3.** Displacement in tensile Specimen

### CAD Model Specifications,


- 1) Length of Tensile Specimen = 51 mm
- 2) Diameter of Tensile Specimen = 9.5 mm
- 3) Number of Nodes = 135199
- 4) Number of Elements = 31400

**Table 6.1:** Displacement in Tensile Specimens

Composite Material	Total Deformation in mm	
	Minimum	Maximum
AlSiC (0%)	0	1.7401
AlSiC (5%)	0	1.4645
AlSiC (10%)	0	2.105
AlSiC (15%)	0	1.4792
AlSiC (20%)	0	1.5645


### VII. CORRELATION AND REGRESSION ANALYSIS

Regression Analysis is done to know how an independent variable(X) is numerically related to the dependent variable (Y). Correlation is a measure of the strength of the relationship between the dependent and the independent variables. Correlation coefficient 'r' varies from -1 to +1, if r=1 indicates strong relationship between the variables. When value of r near to zero implies that there is a little or no linear relation between variables.

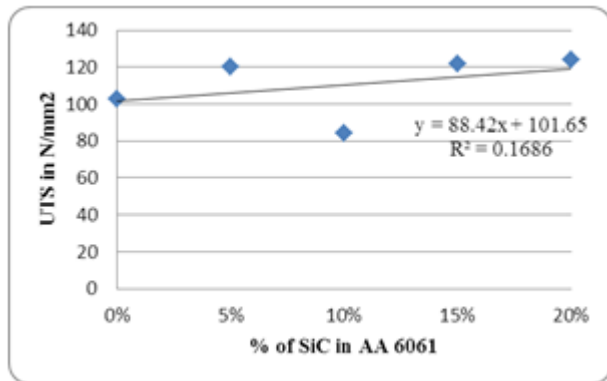

**Figure 7.1:** Curve fit for tensile strength

$$y = 88.42x + 101.65 \quad (1)$$

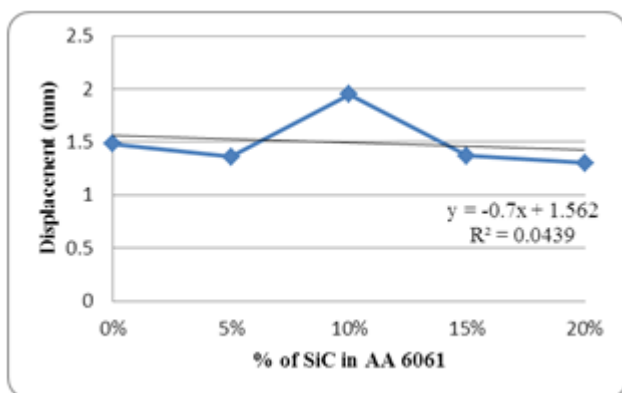

**Figure 7.2:** Curve fit for displacement

$$y = -0.7x + 1.562 \quad (2)$$

Unknown Tensile Strength and Displacement can be predicted by using regression equation (a) and (b) respectively.

### VIII. CONCLUSIONS

Stir casting is a simple method of fabricate of AlSiC MMCs because of its good castability and cost effectiveness. Tensile strength improved by increasing reinforcement concentration

but at 10% SiC there is a drastic fall in tensile strength due to segregation of SiC and casting defect. Experimental results are good agreement with analytical results. Unknown values can be predicted using regression equation by varying the input parameters.

### IX. REFERENCES

- [1] .C. Rajaravi, P.R. Lakshminarayanan “Analysis of Tensile Strength of Al/TiB<sub>2</sub> MMCs in FEA for Different Mould Conditions” *IORS-JMCE Volume 13, Issue May –June 2016*.
- [2] .Neelima Devi. C, Mahesh. V, Selvaraj. N “Mechanical Characterization of Aluminium Silicon Carbide Composite” *International Journal of Applied Engineering Research, Dindigul, Volume 1, Issue March 2011*.
- [3].Rajendra Singh, Yogesh Sharma, Vikas Sharma “Examine of Mechanical Properties of Al 6061/SiC Metal Matrix Composites” *JRPS volume 05, Issue March-July 2014*.
- [4] .R. Kumar, J. Jegan, L. Initha “Processing of Aluminium Metal Matrix Composites (AMMC) Through Stir Casting Route” *International Journal of Research in Mechanical Engineering, volume 2, Issue Dec 2014*.
- [5] .V. Suresh, R. Maguteeswaran, R. Sivasubramaniam, D. Shanmuga Vadivel “Micro Tensile Behavior of LM 25 Aluminium Alloy by Stir Cast Method Compared with Finite Element Method” *International Journal of Research in Mechanical Engineering, Volume 1, Issue 1, July-Sept 2013*.
- [6] .Rohit Sharama, Saurabh Jha. P, Khushboo Kakkar, Kushal Kamboj, Pradeep Sharma “A Review of Aluminium Metal Matrix Composite and Its Properties” *IRJET volume 04, issue 02/02/2017*.
- [7]. Bartakke Nikhal. N, Chivalkar Amey. A, Devrukhar Vaibhav. L, Lamsutkar Sahil. R, Rajnitu Rakshaskar “Mechanical Property Analysis of Aluminum Alumina Composite by Varying the Percentage of Alumina” *Proceedings of IRF-IEEE forum International Conference, Pune, India, 03/04/2016*.
- [8]. S. Krishnaraj, G. Elatharasan “Experimental and Numerical Investigation of Al 6061 Alloy Reinforced with SiC-TiO<sub>2</sub>” *International Journal of Mechanical and Production Engineering, Volume 04, Issue 11/11/2016*.
- [9]. Preetam Kulkarni “Evaluation of Mechanical Properties of Al 2024 Based Hybrid Metal Composites” *IORS-JMCE Volume 12, Issue Sept-Oct 2015*.
- [10].S. Muniaraj, P. Senthil Kumar “Experimental Analysis of Compressive Stress-Strain Rates and Mechanical Properties of Al 6061 and Al 6061-SiC” *IJLTET volume 6, Issue 04/03/2016*.
- [11] .Krishna, Karthik. M “Evaluation of Hardness Strength of Aluminium Alloy (AA 6061) Reinforcement with Silicon Carbide” *IJMEE volume 1, Issue Nov 2014*.
- [12] .Surya Kumar “Analysis and Testing of Aluminium Silicon Carbide Metal Matrix Composites” *PARIPEX Indian Journal of Research, Volume 4, Issue 8/8/2015*.

- [13]. Mahendra Boopathi. M, K. P. Arulshri and N. Iyandurai “Evaluation of Mechanical Properties of Aluminum Alloy 2024 Reinforced With Silicon Carbide and Fly Ash Hybrid Metal Matrix Composites” *American Journal of Applied Sciences*.
- [14] .S. Vijayakumar, M. Souhdarrajan, P. Palanisamy, K. Pasupathi “Studies on Mechanical Properties of Al-Sic Metal Matrix Composite” *SSRG-IJMSE Volume 2, Issue Nov-Dec 2013*.
- [15] .Amardeep Singh, Ajay Singh Rana and Niraj Bala “Study of Wear Behavior of Aluminium Based Composite Fabricated by Stir Casting Technique” *IJMERR Volume 4, Issue Jan 2015*.
- [16].V. Ramakoteswara Rao, N. Ramanaiah and M.M.M. Sarcar “Tribological Properties of Aluminum Metal Matrix Composites (AA 7075 Reinforced with Titanium Carbide (TiC) Particles)” *International Journal of Advance Science and Technology, Volume 88, Issue 2016*.
- [17]. N. Radhika, A. Vaishnavi and G. K. Chandran “Optimization of Dry Sliding Wear Process Parameters for Aluminium Hybrid Metal Matrix Composites” *www.tribology.fink.rs Volume 36, Issue 2014*.
- [18]. Manoj Singla, Lakhvir Singh and Vikas Chawala “Study of Wear Properties of AlSiC Composites” *Journal of Minerals and Materials Characterization and Engineering Volume 8, Issue 2009*.
- [19].T. R. Hemanth Kumar, R. P. Swamy and T. k. Chandrashekar “An Experimental Investigation on Wear Test Parameter of Metal Matrix Composites Using Taguchi Technique” *Indian Journal of Engineering and Materials Sciences, Volume 20, Issue Aug 2013*.
- [20]. Lal Krishna S. K, Arun. M and Sndeeep. P “Development of Silicon Carbide Reinforced Aluminium Composite for Hydraulic Actuators in Space Applications” *IMPACT-IJRET Volume 3, Issue 8/8/2015*.
- [21]. Kanak Kalita, Rakesh Chaudhari and M. Ramachandra “Mechanical Characterization and Finite Element Investigation on Properties of PLA-Jute Composite” *International Journal of Computer Applications Volume 123, Issue Aug 2015*.
- [22]. N. Esmaeil, J. L. Alves and C. Teodosiu “Simulation Of Vickers Micro Indentation Test On Dual Phase Steel Utilizing VCAD Based Software” *Manufacturing Process Simulation Team, VCAD System Research 2009*.